


Block pavior access covers

80mm galvanised mild steel cover and frame

This comprehensive range of recessed manhole covers and frames are for use in areas of block paving where it is desirable to have continuity of surface finish and pattern. They are recessed 80mm for use with up to 60mm block pavior and galvanised to BS EN ISO 1461. The table below lists the main standard sizes with non standard sizes available on request. The lifting keyways are all reinforced to help avoid distortion.

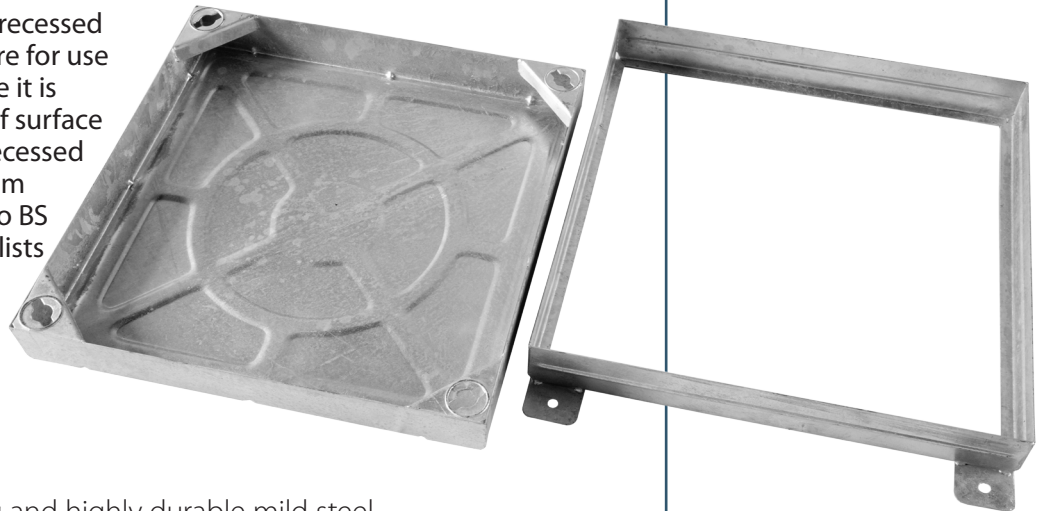


- Manufactured from strong and highly durable mild steel
- Steel frames have superior adherence to bedding mortar than plastic frames
- Reinforced lifting keyways to help avoid distortion when lifting
- Galvanised to BS EN ISO 1461
- Keyway protectors as standard to help prevent debris ingress

Range details

Clear opening (mm)	Tray depth (mm)	Over frame size (mm)	Overall frame depth (mm)	GLVW	Load duty description	SMWL pneumatic	FACTA Class (comparative)	Wrekin product code
300 x 300	80	435 x 340	85	10tn	Light/Medium	2.5tn	AAA	C281M/030030
450 x 450	80	585 x 490	85	10tn	Light/Medium	2.5tn	AAA	C281M/045045
600 x 450	80	655 x 600	85	10tn	Light/Medium	2.5tn	AAA	C281M/060045
600 x 600	80	750 x 640	85	10tn	Light/Medium	2.5tn	AAA	C281M/060060
675 x 675	80	815 x 715	85	10tn	Light/Medium	2.5tn	AAA	C281M/067067
750 x 600	80	790 x 750	85	10tn	Light/Medium	2.5tn	AAA	C281M/075060
750 x 750	80	900 x 790	85	10tn	Light/Medium	2.5tn	AAA	C281M/075075
900 x 600	80	940 x 740	85	10tn	Light/Medium	2.5tn	AAA	C281M/090060

GLVW = Gross Laden Vehicle Weight : SMWL = Slow Moving Wheel Load

This product is designed to fit all major PPIC inspection chambers and eliminates the need to cut paving around a circular opening and can be rotated to match the direction of the paving.



Clear opening (mm)	Tray depth (mm)	Over frame size (mm)	Overall frame depth (mm)	GLVW	Load duty description	SMWL pneumatic	FACTA Class (comparative)	Wrekin product code
300 dia.	80	470 x 390	85	10tn	Light/Medium	2.5tn	AAA	C281M/030030/SQR
450 dia.	80	622 x 540	85	10tn	Light/Medium	2.5tn	AAA	C281M/045045/SQR

GLVW = Gross Laden Vehicle Weight : SMWL = Slow Moving Wheel Load



1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves that the above data is current.
3. Wrekin cannot be held responsible for the performance of these products as conditions of use are beyond our control.
4. Installation details are available on request.