


TriStar


D400 straight bar gully grate

Wrekin has developed its most competitive gully grate to date. The new TriStar gully addresses many issues related to cost-effective products.

Illustrated
DGH0D4/4337/KT

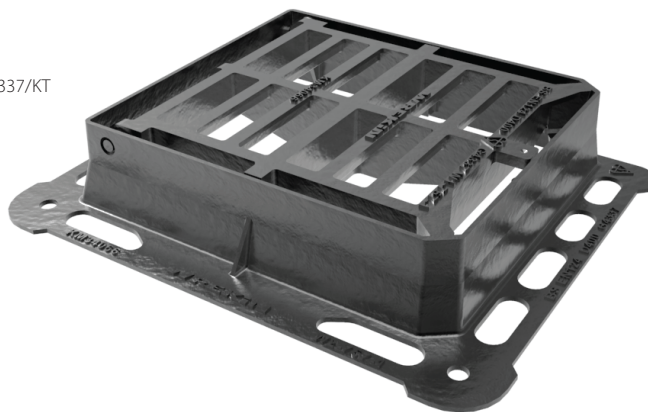

- D400** For use up to D400 Group 3 locations carriageway environment
-  Fully comply with BS EN 124:1994 and Kitemarked by BSI
- HA104/09** Complies fully with Highways England (Formerly UK Highways Agency)
-  1050 cm² waterway area
-  Wedge seat for non-rock and non-slide stability
-  Manufactured from strong and highly durable ductile iron
-  Captive hinges reduce theft risk whilst allowing easy lifting for gully cleaning

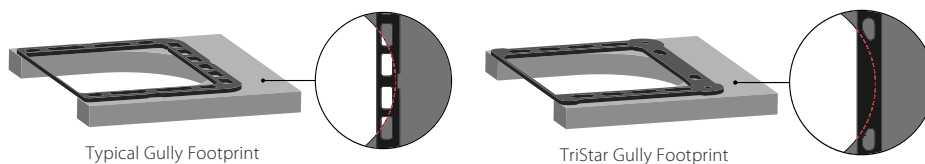


The frame has been designed to suit all existing gully pot styles and will sit over a typical 450mm Ø circular or horseshoe chamber.

The frame has been designed with an anti-debris feature to stop the backfill material entering the chamber.

Range details

Wrekin product code	Waterway area (cm ²)	Clear area size (Cx D mm)	Frame depth (mm)	Over frame size (Ax B mm)	Clear area at base (Cx D mm)
DGH0D4/4337/KT	1050	430 x 370	100	595 x 475	450 x 395
DGH0D6/4337/KT	1050	430 x 370	150	595 x 475	450 x 395

Available options: Screw-locking to deter unauthorised access to the gully chamber (will require standard extended-shank socket set tooling to engage/disengage locking screw).

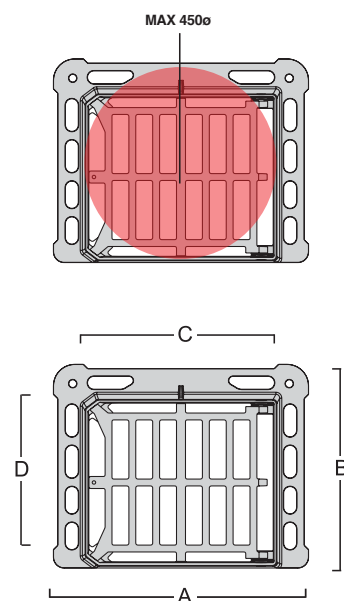

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves that the above data is current.
3. Wrekin cannot be held responsible for the performance of these products as conditions of use are beyond our control.
4. Installation details are available on request.